

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau(43) International Publication Date  
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number  
**WO 2004/028875 A1**(51) International Patent Classification<sup>7</sup>: **B60S 1/40**, 1/38Eric [BE/BE]; Federal-Mogul S.A., Avenue Champion,  
B-6790 Aubange (BE).(21) International Application Number:  
PCT/EP2003/050646(74) Agent: **HOOVELD, Arjen, J., W.**; Arnold & Siedsma,  
Sweelinckplein 1, NL-2517 GK The Hague (NL).(22) International Filing Date:  
23 September 2003 (23.09.2003)(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

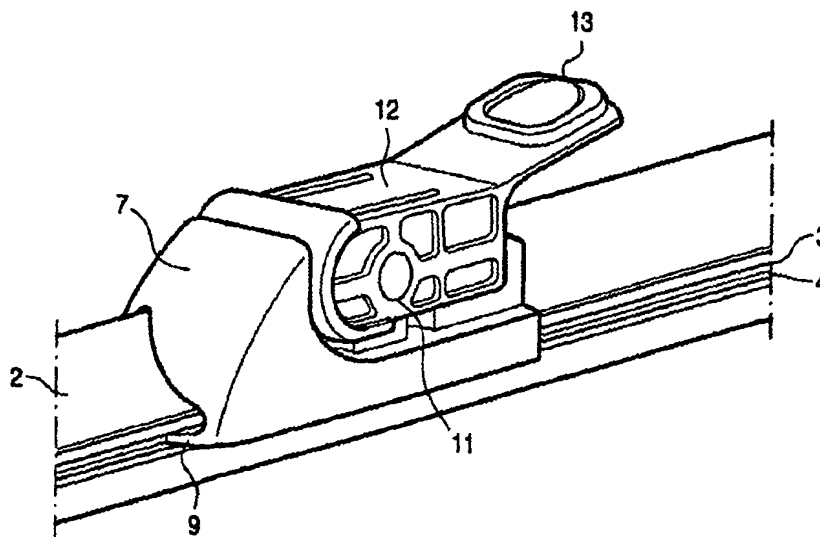
(26) Publication Language: English

(30) Priority Data:  
02102379.1 24 September 2002 (24.09.2002) EP(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).(71) Applicant (*for all designated States except US*): **FED-  
ERAL-MOGUL S.A.** [BE/BE]; Avenue Champion,  
B-6790 Aubange (BE).Published:  
— with international search report

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BOLAND, Xavier**  
[BE/BE]; Federal-Mogul S.A., Avenue Champion, B-6790  
Aubange (BE). **HENIN, Pierre** [BE/BE]; Federal-Mogul  
S.A., Avenue Champion, B-6790 Aubange (BE). **COOS,**

[Continued on next page]

(54) Title: A WINDSCREEN WIPER DEVICE

(57) Abstract: A windscreen wiper device (1) comprising an elastic, elongated carrier element, as well as an elongated wiper blade (2) of a flexible material, which can be placed in abutment with a windscreen to be wiped, which wiper blade (2) includes opposing longitudinal grooves (3) on its longitudinal sides, in which grooves (3) spaced-apart longitudinal strips (4) of the carrier element are disposed, wherein neighbouring ends of said longitudinal strips (4) are interconnected by a respective connecting piece (6), which windscreen wiper device comprises a connecting device (7) for an oscillating arm (8), wherein said oscillating arm (8) is pivotally connected to said connecting device (7) about a pivot axis near one end, with the interposition of a joint part (12), with the special feature that said connecting device (7) is positioned at least substantially within said joint part (12).